




P52 Series Ceiling Fan

Architectural & Engineering Specifications
August 1, 2007

| Model # | Housing Finish Option | Reversible Blades |
|-------------|-----------------------|-------------------|
| P52RB5WL/P | Oil Rubbed Bronze | Walnut/Oak |
| P52NK5MP/RS | Brushed Nickel | Maple/Rosewood |

| Fan Assembly Includes |
|-----------------------|
| Fan Motor |
| Decorative Housing |
| Canopy |
| MDF Blades |

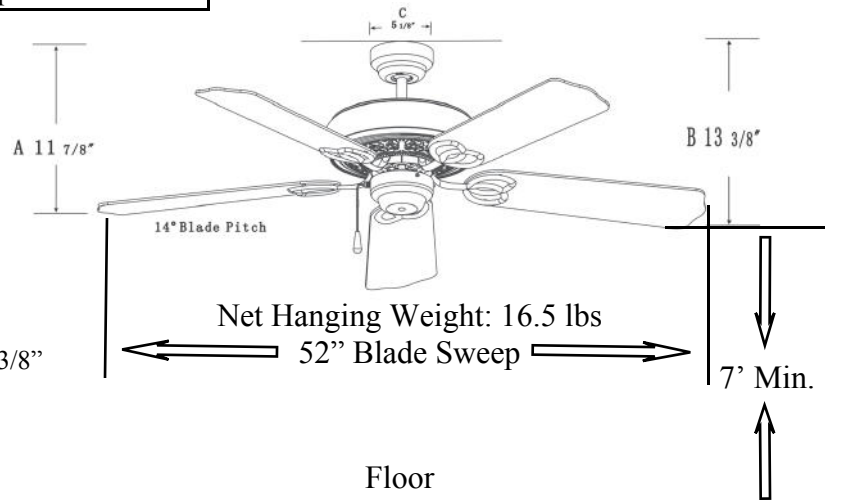

- A: From Ceiling to the Blades - 11 7/8"
- B: From Ceiling to the bottom of fan or light kits - 13 3/8"
- C: Diameter of Canopy - 5 1/8"

Dimensions shown in inches

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of 50 lbs.



ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60Hz, 0.69 amp circuit.

FAN SPEEDS:

3 Speeds, reverse switch(on switch cap): High - 200rpm, Med - 136rpm, Low - 84rpm.

DOWN ROD OPTIONS:

The fan comes with a standard 6" down rod. Optional rods available in 12", 18", 24", 36", 48", 60" and 72"
The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations required a down rod longer than the standard 6" down rod.

Optional sloped ceiling ball kits are available.
Call tech support for more information. 1-888-5-SUNWAY

BLADE SETS:

MDF blades and blade holders are included with this fan. Not recommended for Damp Location. Standard blade color above other colors available.

DAMP LOCATION:

Fan assembly not rated for Damp Location usage.

OPTIONAL ACCESSORIES:

Wall Controls, Remote Controls, Light Kits, Scrolls.

Sunway Fan Company, Inc. / 1505-A Kelly Blvd., Carrollton, TX. 75006
Product specifications subject to change without notice

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|--|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted By: Date: |