



# SUN308 Series Ceiling Fan


Architectural & Engineering Specifications  
August 1, 2007

Model #	Housing Finish Option	Reversible Blades
SUN308NK5MP/RS	Brushed Nickel	Maple/Rosewood

Fan Assembly Includes
Fan Motor Decorative Housing Canopy MDF Blades

- A: From Ceiling to the Blades
- B: From Ceiling to the bottom of fan or light kits
- C: Diameter of Canopy

*Dimensions shown in inches*

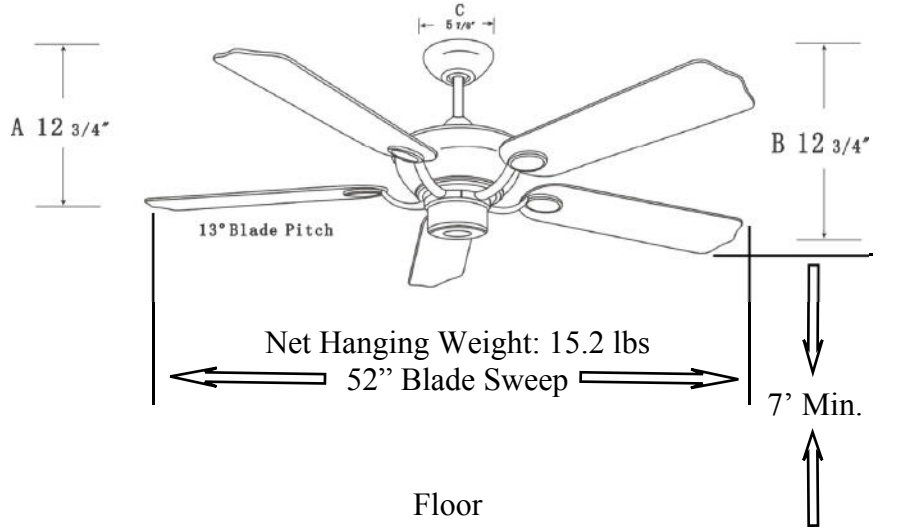

## INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of 50 lbs.



## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60Hz, 0.57 amp circuit.

## FAN SPEEDS:

3 Speeds, reverse switch(on switch cap): High - 180rpm, Med - 116rpm, Low - 73rpm.

## DOWN ROD OPTIONS:

The fan comes with a standard 6" down rod. Optional rods available in 12", 18", 24", 36", 48", 60" and 72"

The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations required a down rod longer than the standard 6" down rod.

Optional sloped ceiling ball kits are available.

Call tech support for more information. 1-888-5-SUNWAY

## BLADE SETS:

MDF blades and blade holders are included with this fan. Not recommended for Damp Location. Standard blade color above, other colors available.

## DAMP LOCATION:

Fan assembly not rated for Damp Location usage.

## OPTIONAL ACCESSORIES:

Wall Controls, Remote Controls, Light Kits, Scrolls.

Sunway Fan Company, Inc. / 1505-A Kelly Blvd., Carrollton, TX. 75006  
*Product specifications subject to change without notice*

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted By: <span style="float: right;">Date:</span>