




Sun565 Series Ceiling Fan

Architectural & Engineering Specifications
August 1, 2007

Model #	Housing Finish Option	Reversible Blades
SUN565RB5P	Oil Rubbed Bronze	Walnut/Oak

Fan Assembly Includes
Lighted Fan Motor Housing Decorative Housing Canopy MDF Blades

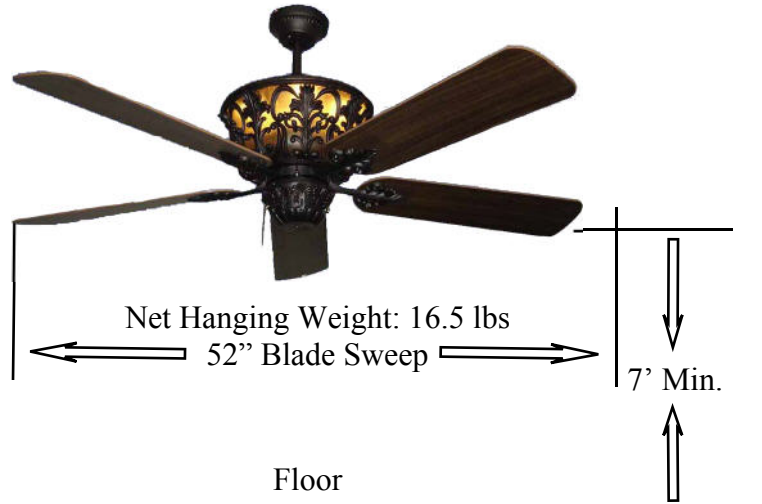

- A: From Ceiling to the Blades - 15"
- B: From Ceiling to the bottom of fan or light kits - 17"
- C: Diameter of Canopy - 5 1/8"

Dimensions shown in inches

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of 50 lbs.



ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60Hz, 0.69 amp circuit.

Lighted motor housing: Housing light only, housing and light kit only, light kit only, all off.

FAN SPEEDS:

3 Speeds, reverse switch(on switch cap): High - 200rpm, Med - 136rpm, Low - 84rpm.

DOWN ROD OPTIONS:

The fan comes with a standard 6" down rod. Optional rods available in 12", 18", 24", 36", 48", 60" and 72"

The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations required a down rod longer than the standard 6" down rod.

Optional sloped ceiling ball kits are available.

Call tech support for more information. 1-888-5-SUNWAY

BLADE SETS:

MDF blades and blade holders are included with this fan. Not recommended for Damp Location. Standard blade color above other colors available.

DAMP LOCATION:

Fan assembly not rated for Damp Location usage.

OPTIONAL ACCESSORIES:

Wall Controls, Remote Controls, Light Kits, Scrolls.

Sunway Fan Company, Inc. / 1505-A Kelly Blvd., Carrollton, TX. 75006

Product specifications subject to change without notice

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted By: Date: